




Fiber Optic Splice Closure OPGW Dome

AR-SC-4P-OPGW-M



Specification sheet

1 General

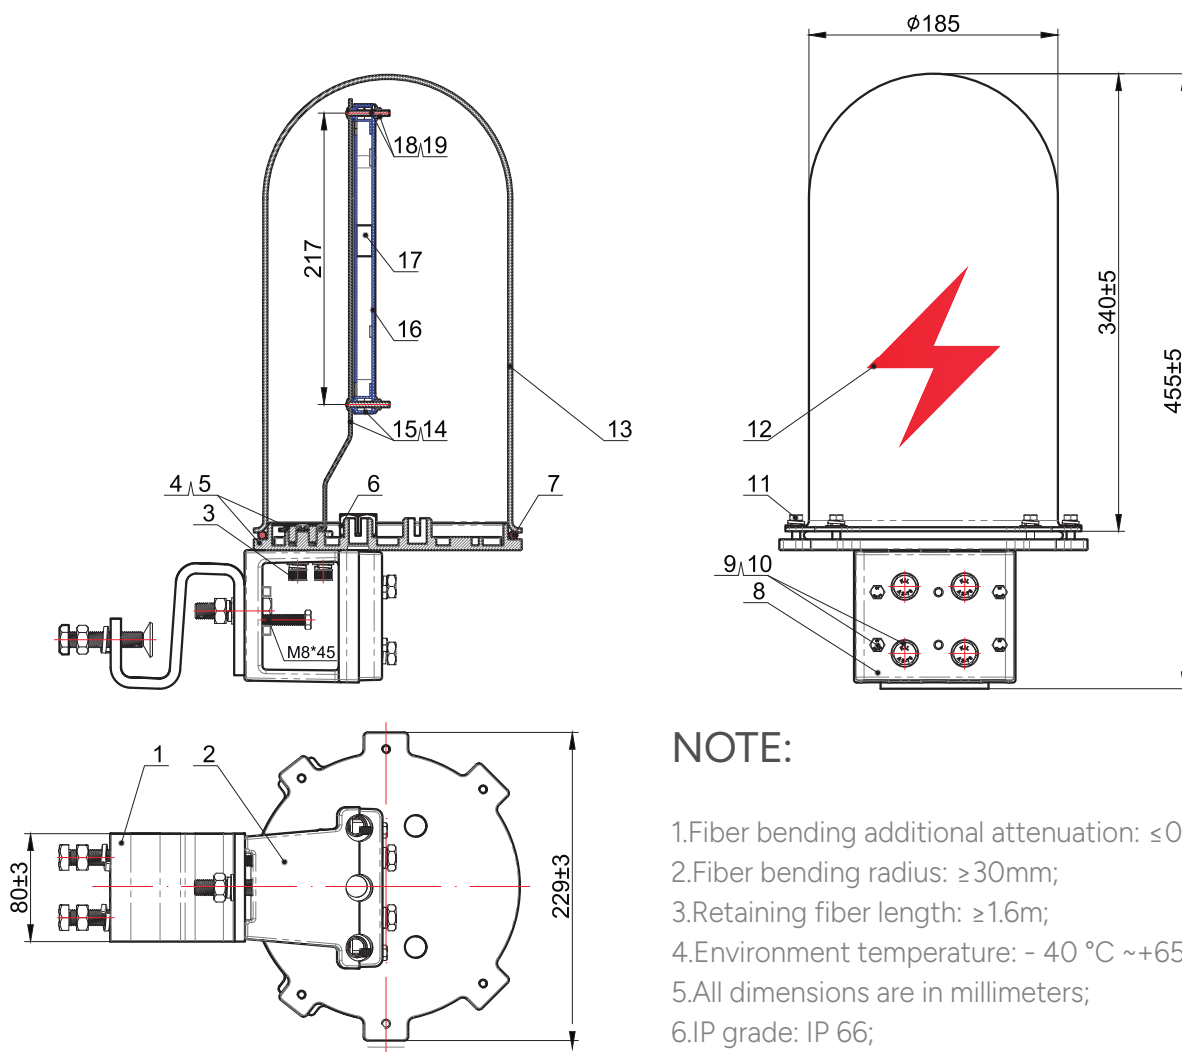

NOTE:

1. Fiber bending additional attenuation: $\leq 0.01\text{dB}$;
2. Fiber bending radius: $\geq 30\text{mm}$;
3. Retaining fiber length: $\geq 1.6\text{m}$;
4. Environment temperature: $-40\text{ }^{\circ}\text{C} \sim +65\text{ }^{\circ}\text{C}$;
5. All dimensions are in millimeters;
6. IP grade: IP 66;

Item	Description	Qty	Type	Type
1	Fixtures	1		Hot dip galvanized
2	Base	1		Aluminum alloy
3	Bolt	4	M8*20	Stainless steel
4	Disk	1	2-way	Aluminum alloy
5	Screw	2	M6*10	Stainless steel
6	Nut	2	M21	Aluminum alloy
7	Washer	1	$\phi 8 \times 178.8$	
8	Cover sheet	1		Aluminum alloy
9	Bolt	4	M6*16	Stainless steel

① General

Item	Description	Qty	Type	Type
10	Bolt	4	M10*35	Stainless steel
11	Bolt	6	M6*20	Stainless steel
12	Identification	1	Red	
13	Hat barrel	1		Aluminum alloy
14	Bracket	1	Q235	Hot dip galvanized
15	Fiber container	1		
16	Cover plate	1		
17	Card slot	2	12 core	EPDM
18	Screw	2	M4*30	Hot dip galvanized
19	Nut	2	M4	Stainless steel

Tolerance

≤30mm	± 1.5mm
>30mm	±5%

1.1 Image reference

